

LUMiLiFe



LIGHTING CATALOGUE 2021

LED SPOTLIGHTS



SKU	Watt.	Lumens	Wattage Equiv	Colour Temp	Beam Angle	Dimmable	Lifetime (Hrs)	Size (mm)	Finish	Cap
GU10 SPOTLIGHTS										
S16368	4.6W	375	50W	2700K	36°	Yes	25,000	50x54	Opal	GU10
S16370	4.6W	375	50W	4000K	36°	Yes	25,000	50x54	Opal	GU10
S16372	4.6W	375	50W	5000K	36°	Yes	25,000	50x54	Opal	GU10
S16373	5W	450	65W	2700K	36°	Yes	25,000	50x54	Opal	GU10
S16374	5W	450	65W	4000K	36°	Yes	25,000	50x54	Opal	GU10
S16375	5W	450	65W	5000K	36°	Yes	25,000	50x54	Opal	GU10
S16376	6W	500	45W	2700K	110°	Yes	25,000	50x54	Opal	GU10
S16377	6W	500	45W	4000K	110°	Yes	25,000	50x54	Opal	GU10
S16378	6W	500	45W	5000K	110°	Yes	25,000	50x54	Opal	GU10
S16367	4.2W	375	50W	2700K	36°	No	15,000	50x54	Opal	GU10
S16369	4.2W	375	50W	4000K	36°	No	15,000	50x54	Opal	GU10
S16371	4.2W	375	50W	5000K	36°	No	15,000	50x54	Opal	GU10



											
SKU	Watt.	Lumens	Wattage Equiv	Colour Temp	Beam Angle	Dimmable	Lifetime (Hrs)	Size (mm)	Finish	Cap	
GLASS BODIED GU10 SPOTLIGHTS											1
S16380	4.6W	375	65W	2700K	36°	Yes	25,000	50x52	Opal	GU10	
S16382	4.6W	375	65W	4000K	36°	Yes	25,000	50x52	Opal	GU10	
S16384	4.6W	375	65W	5000K	36°	Yes	25,000	50x52	Opal	GU10	
S16379	4W	345	50W	2700K	36°	No	15,000	50x52	Opal	GU10	
S16381	4W	345	50W	4000K	36°	No	15,000	50x52	Opal	GU10	
S16383	4W	345	50W	5000K	36°	No	15,000	50x52	Opal	GU10	
MR16 SPOTLIGHTS											2
S16391	4.8W	345	35W	2700K	36°	Yes	25,000	50x45	Opal	MR16	
S16392	4.8W	345	35W	4000K	36°	Yes	25,000	50x45	Opal	MR16	
S16393	4.8W	345	35W	5000K	36°	Yes	25,000	50x45	Opal	MR16	
S16385	4.5W	375	65W	2700K	36°	No	15,000	50x45	Opal	MR16	
S16386	4.5W	375	65W	4000K	36°	No	15,000	50x45	Opal	MR16	
S16387	4.5W	375	65W	5000K	36°	No	15,000	50x45	Opal	MR16	
S16388	6.5W	520	50W	2700K	36°	No	15,000	50x45	Opal	MR16	
S16389	6.5W	520	50W	4000K	36°	No	15,000	50x45	Opal	MR16	
S16390	6.5W	520	50W	5000K	36°	No	15,000	50x45	Opal	MR16	

LED LAMPS



SKU	Watt.	Lumens	Wattage Equiv	Colour Temp	Beam Angle	Dimmable	Lifetime (Hrs)	Size (mm)	Finish	Cap
GLS BC/B22										
S16401	6W	500	40W	2700K	240°	Yes	25,000	60x108	Opal	BC/B22
S16405	8.8W	806	60W	2700K	220°	Yes	25,000	60x108	Opal	BC/B22
S16407	8.8W	806	60W	4000K	220°	Yes	25,000	60x108	Opal	BC/B22
S16409	8.8W	806	60W	6500K	220°	Yes	25,000	60x108	Opal	BC/B22
S16410	11W	1060	75W	2700K	220°	Yes	25,000	60x108	Opal	BC/B22
S16411	11W	1060	75W	4000K	220°	Yes	25,000	60x108	Opal	BC/B22
S16412	11W	1060	75W	6500K	220°	Yes	25,000	60x108	Opal	BC/B22
S16413	13W	1521	100W	2700K	220°	Yes	25,000	60x119	Opal	BC/B22
S16414	13W	1521	100W	4000K	220°	Yes	25,000	60x119	Opal	BC/B22
S16415	13W	1521	100W	6500K	220°	Yes	25,000	60x119	Opal	BC/B22
S16400	5.5W	470	40W	2700K	220°	No	15,000	60x108	Opal	BC/B22
S16402	5.5W	470	40W	4000K	220°	No	15,000	60x108	Opal	BC/B22
S16403	5.5W	470	40W	6500K	220°	No	15,000	60x108	Opal	BC/B22
S16404	8.2W	806	60W	2700K	220°	No	15,000	60x108	Opal	BC/B22
S16406	8.2W	806	60W	4000K	220°	No	15,000	60x108	Opal	BC/B22
S16408	8.2W	806	60W	6500K	220°	No	15,000	60x108	Opal	BC/B22

 SKU	 Watt.	 Lumens	 Wattage Equiv	 Colour Temp	 Beam Angle	 Dimmable	 Lifetime (Hrs)	 Size (mm)	 Finish	 Cap
GLS ES/E27										
S16429	6W	500	40W	2700K	240°	Yes	25,000	60x110	Opal	ES/E27
S16433	8.8W	806	60W	2700K	220°	Yes	25,000	60x110	Opal	ES/E27
S16435	8.8W	806	60W	4000K	220°	Yes	25,000	60x110	Opal	ES/E27
S16437	8.8W	806	60W	6500K	220°	Yes	25,000	60x110	Opal	ES/E27
S16438	11W	1060	75W	2700K	220°	Yes	25,000	60x110	Opal	ES/E27
S16439	11W	1060	75W	4000K	220°	Yes	25,000	60x110	Opal	ES/E27
S16440	11W	1060	75W	6500K	220°	Yes	25,000	60x110	Opal	ES/E27
S16441	13W	1521	100W	2700K	220°	Yes	25,000	60x119	Opal	ES/E27
S16442	13W	1521	100W	4000K	220°	Yes	25,000	60x119	Opal	ES/E27
S16443	13W	1521	100W	6500K	220°	Yes	25,000	60x119	Opal	ES/E27
S16428	5.5W	470	40W	2700K	220°	No	15,000	60x110	Opal	ES/E27
S16430	5.5W	470	40W	4000K	220°	No	15,000	60x110	Opal	ES/E27
S16431	5.5W	470	40W	6500K	220°	No	15,000	60x110	Opal	ES/E27
S16432	8.2W	806	60W	2700K	220°	No	15,000	60x110	Opal	ES/E27
S16434	8.2W	806	60W	4000K	220°	No	15,000	60x110	Opal	ES/E27
S16436	8.2W	806	60W	6500K	220°	No	15,000	60x110	Opal	ES/E27
CANDLE										
S16422	5W	470	40W	2700K	280°	Yes	25,000	35x102	Opal	SES/E14
S16423	5W	470	40W	4000K	280°	Yes	25,000	35x102	Opal	SES/E14
S16424	5W	470	40W	6500K	280°	Yes	25,000	35x102	Opal	SES/E14
S16444	5W	470	40W	2700K	280°	Yes	25,000	35x98	Opal	ES/E27
S16445	5W	470	40W	4000K	280°	Yes	25,000	35x98	Opal	ES/E27
S16446	5W	470	40W	6500K	280°	Yes	25,000	35x98	Opal	ES/E27
S16416	5W	470	40W	2700K	280°	Yes	25,000	35x97	Opal	BC/B22
S16417	5W	470	40W	4000K	280°	Yes	25,000	35x97	Opal	BC/B22
S16418	5W	470	40W	6500K	280°	Yes	25,000	35x97	Opal	BC/B22
S16394	5W	470	40W	2700K	280°	Yes	25,000	35x101	Opal	SBC/B15
S16395	5W	470	40W	4000K	280°	Yes	25,000	35x101	Opal	SBC/B15
S16396	5W	470	40W	6500K	280°	Yes	25,000	35x101	Opal	SBC/B15

SKU	 Watt.	 Lumens	 Wattage Equiv	 Colour Temp	 Beam Angle	 Dimmable	 Lifetime (Hrs)	 Size (mm)	 Finish	 Cap
GOLF										
S16425	5W	470	40W	2700K	240°	Yes	25,000	45x78	Opal	SES/E14
S16426	5W	470	40W	4000K	240°	Yes	25,000	45x78	Opal	SES/E14
S16427	5W	470	40W	6500K	240°	Yes	25,000	45x78	Opal	SES/E14
S16447	5W	470	40W	2700K	240°	Yes	25,000	45x74	Opal	ES/E27
S16448	5W	470	40W	4000K	240°	Yes	25,000	45x74	Opal	ES/E27
S16449	5W	470	40W	6500K	240°	Yes	25,000	45x74	Opal	ES/E27
S16419	5W	470	40W	2700K	240°	Yes	25,000	45x73	Opal	BC/B22
S16420	5W	470	40W	4000K	240°	Yes	25,000	45x73	Opal	BC/B22
S16421	5W	470	40W	6500K	240°	Yes	25,000	45x73	Opal	BC/B22
S16397	5W	470	40W	2700K	240°	Yes	25,000	45x77	Opal	SBC/B15
S16398	5W	470	40W	4000K	240°	Yes	25,000	45x77	Opal	SBC/B15
S16399	5W	470	40W	6500K	240°	Yes	25,000	45x77	Opal	SBC/B15
R50										
S16450	6.2W	450	40W	2700K	110°	No	15,000	50x85	Opal	SES/E14
S16451	6.2W	450	40W	4000K	110°	No	15,000	50x85	Opal	SES/E14
S16452	6.2W	450	40W	6500K	110°	No	15,000	50x85	Opal	SES/E14
R63										
S16453	7.8W	630	50W	2700K	110°	No	15,000	63x102	Opal	ES/E27
S16454	7.8W	630	50W	4000K	110°	No	15,000	63x102	Opal	ES/E27
S16455	7.8W	630	50W	6500K	110°	No	15,000	63x102	Opal	ES/E27
R80										
S16456	10.5W	800	60W	2700K	110°	No	15,000	80x114	Opal	ES/E27
S16454	10.5W	800	60W	4000K	110°	No	15,000	80x114	Opal	ES/E27
S16455	10.5W	800	60W	6500K	110°	No	15,000	80x114	Opal	ES/E27
CAPSULE										
S16488	2W	200	20W	2700K	320°	No	15,000	13.5x50	Opal	G9
S16489	2W	200	20W	4000K	320°	No	15,000	13.5x50	Opal	G9




LED FILAMENT LAMPS



GLS

SKU	 Watt.	 Lumens	 Wattage Equiv	 Colour Temp	 Beam Angle	 Dimmable	 Lifetime (Hrs)	 Size (mm)	 Finish	 Cap
GLS										
S16465	9W	1060	75W	2700K	320°	Yes	15,000	60x104	Clear	BC/B22
S16466	9W	1060	75W	4000K	320°	Yes	15,000	60x104	Clear	BC/B22
S16486	9W	1060	75W	2700K	320°	Yes	15,000	60x105	Clear	ES/E27
S16487	9W	1060	75W	4000K	320°	Yes	15,000	60x105	Clear	ES/E27
S16462	12W	1521	100W	2700K	320°	No	25,000	67x122	Clear	BC/B22
S16482	12W	1521	100W	2700K	320°	No	25,000	67x109	Clear	ES/E27
CANDLE										
S16459	4.8W	300	30W	2000K	320°	Yes	15,000	35x91	Amber	BC/B22
S16463	4.8W	450	40W	2700K	320°	Yes	15,000	35x91	Clear	BC/B22
S16468	4.8W	300	30W	2000K	320°	Yes	15,000	35x98	Amber	SES/E14
S16474	4.8W	450	40W	2700K	320°	Yes	15,000	35x98	Clear	SES/E14
S16476	4.8W	300	30W	2000K	320°	Yes	15,000	35x92	Amber	ES/E27
S16484	4.8W	450	40W	2700K	320°	Yes	15,000	35x92	Clear	ES/E27
S16471	2.3W	250	25W	2700K	320°	No	15,000	35x98	Clear	SES/E14

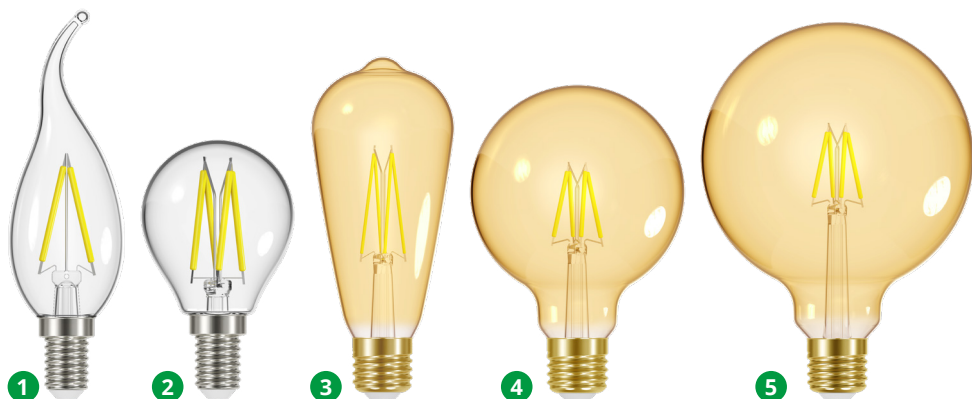

SKU	Watt.	Lumens	Wattage Equiv	Colour Temp	Beam Angle	Dimmable	Lifetime (Hrs)	Size (mm)	Finish	Cap
FLAME TIP CANDLE										
S16469	4.8W	300	30W	2000K	320°	Yes	15,000	35x119	Amber	SES/E14
S16477	4.8W	300	30W	2000K	320°	Yes	15,000	35x113	Amber	ES/E27
S16460	4.8W	300	30W	2000K	320°	Yes	15,000	35x112	Amber	BC/B22
S16472	2.3W	250	25W	2000K	320°	No	15,000	35x119	Clear	SES/E14
GOLF										
S16470	4.8W	300	30W	2000K	320°	Yes	15,000	45x78	Amber	SES/E14
S16475	4.8W	450	30W	2700K	320°	Yes	15,000	45x78	Clear	SES/E14
S16478	4.8W	300	30W	2000K	320°	Yes	15,000	45x76	Amber	ES/E27
S16485	4.8W	450	30W	2700K	320°	Yes	15,000	45x76	Clear	ES/E27
S16461	4.8W	300	30W	2000K	320°	Yes	15,000	45x75	Amber	BC/B22
S16464	4.8W	450	30W	2700K	320°	Yes	15,000	45x75	Clear	BC/B22
S16473	2.3W	250	25W	2000K	320°	No	15,000	45x78	Clear	SES/E14
S16483	2.3W	250	25W	2000K	320°	No	15,000	45x76	Clear	ES/E27
S16467	2.3W	250	25W	2000K	320°	No	15,000	45x75	Clear	BC/B22
TEAR DROP										
S16481	7.5W	600	48W	2000K	320°	Yes	15,000	64x145	Amber	ES/E27
LARGE GLOBE										
S16480	7.5W	600	48W	2000K	320°	Yes	15,000	95x138	Amber	ES/E27
EXTRA LARGE GLOBE										
S16479	7.5W	600	48W	2000K	320°	Yes	15,000	125x178	Amber	ES/E27



GU10 DOWNLIGHTS

FIRE RATED DOWNLIGHTS

SKU	Max Watt.	Fire Rating	IP Rating	Tiltable	Cut-Out (mm)	Size (mm)	Finish	Lamp
S15499	50W	Yes	IP20	No	72	122x85.5	Brushed	GU10
S15500	50W	Yes	IP20	No	72	122x85.5	Chrome	GU10
S15501	50W	Yes	IP20	No	72	122x85.5	White	GU10



TILT FIRE RATED DOWNLIGHTS

S15502	50W	Yes	IP20	Yes	83	121x96	Brushed	GU10
S15503	50W	Yes	IP20	Yes	83	121x96	Chrome	GU10
S15504	50W	Yes	IP20	Yes	83	121x96	White	GU10



IP65 DOWNLIGHTS

S15505	50W	Yes	IP65	No	72	122x88	Brushed	GU10
S15506	50W	Yes	IP65	No	72	122x88	Chrome	GU10
S15507	50W	Yes	IP65	No	72	122x88	White	GU10






LED DOWNLIGHTS



SKU	Watt.	Lumens	Colour Temp	Beam Angle	IP Rating	Dimmable	Lifetime (Hrs)	Cut-Out (mm)	Size (mm)	Finish
DIMMABLE DOWNLIGHT TRI-WHITE (3000/4000/5700K)										
S16307	10W	800-940	Tri-White	90°	IP54	Yes	40,000	90-95	80x39	White
DOWNLIGHT FROSTED DIFFUSER LOOP IN & LOOP OUT TRI-WHITE (3000/4000/5700K)										
S16228	8W	800	Tri-White	90°	IP54	No	40,000	90-100	90x110x70	White
S16230	13W	1300	Tri-White	90°	IP54	No	40,000	125-135	125x145x82	White
S16232	15W	1500	Tri-White	90°	IP54	No	40,000	150-160	150x172x95	White
S16234	18W	1800	Tri-White	90°	IP54	No	40,000	200-210	200x228x98	White
S16236	25W	2500	Tri-White	90°	IP54	No	40,000	200-210	200x228x98	White
DOWNLIGHT SPECULAR DIFFUSER LOOP IN & LOOP OUT UGR19 TRI-WHITE (3000/4000/5700K)										
S16267	6W	600	Tri-White	90°	IP54	No	40,000	90-100	90x110x70	White
S16229	13W	1300	Tri-White	90°	IP54	No	40,000	125-135	125x145x82	White
S16231	15W	1500	Tri-White	90°	IP54	No	40,000	150-160	150x172x95	White
S16233	18W	1800	Tri-White	90°	IP54	No	40,000	200-210	200x228x98	White
S16235	25W	2500	Tri-White	90°	IP54	No	40,000	200-210	200x228x98	White

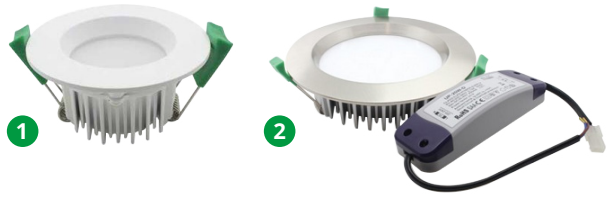

SKU	Watt.	Lumens	Colour Temp	Beam Angle	IP Rating	Dimmable	Lifetime (Hrs)	Cut-Out (mm)	Size (mm)	Finish	
DOWNLIGHT WITH TRIAC DRIVER											1
S16187	7W	420	2700K	90°	IP54	Yes	25,000	60	80x39	White	
S16186	7W	460	5700K	90°	IP54	Yes	25,000	60	80x39	White	
S16188	7W	420	2700K	90°	IP54	Yes	25,000	60	80x39	Brushed	
S16195	7W	460	5700K	90°	IP54	Yes	25,000	60	80x39	Brushed	
S16190	18W	1360	2700K	90°	IP54	Yes	25,000	140	170x45	White	
S16189	18W	1480	5700K	90°	IP54	Yes	25,000	140	170x45	White	
S16197	18W	1360	2700K	90°	IP54	Yes	25,000	140	170x45	Brushed	
S16196	18W	1480	5700K	90°	IP54	Yes	25,000	140	170x45	Brushed	2
S16192	25W	1800	2700K	90°	IP54	Yes	25,000	140	170x45	White	
S16191	25W	2000	4000K	90°	IP54	Yes	25,000	140	170x45	White	
S16198	25W	1850	5700K	90°	IP54	Yes	25,000	140	170x45	White	
S16199	35W	2630	4000K	90°	IP54	Yes	25,000	160	190x145	White	
S16193	35W	2760	5700K	90°	IP54	Yes	25,000	160	190x145	White	
DOWNLIGHT NON DIMMABLE											
S16200	45W	3900	4000K	90°	IP20	No	25,000	230	280x52	White	
S16194	45W	3900	5700K	90°	IP20	No	25,000	230	280x52	White	



SKU	Watt.	Lumens	Colour Temp	Beam Angle	IP Rating	Dimmable	Lifetime (Hrs)	Cut-Out (mm)	Size (mm)	Finish
TP(b) RATED SLIM DOWNLIGHT										
S16297	18W	1800	3000K	110°	IP20	No	50,000	205-210	210x225x12	White
S16298	18W	1800	4000K	110°	IP20	No	50,000	205-210	210x225x12	White
S16299	18W	1800	5000K	110°	IP20	No	50,000	205-210	210x225x12	White
RECESSED SCOOP DIMMABLE DOWNLIGHT										
S16267	35W	3550	5000K	45°	IP20	Yes	50,000	165-170	180x128.5	White
SURFACE MOUNTED DIMMABLE DOWNLIGHT TRI-WHITE (3000/4000/5700K)										
S16273	12W	1090-1130	Tri-White	120°	IP54	Yes	50,000	N/A	250x53	White
S16274	18W	1740-1840	Tri-White	120°	IP54	Yes	50,000	N/A	300x58	White
S16275	18W	1740-1840	Tri-White	120°	IP54	Yes	50,000	N/A	300x58	White



SKU	Compatible Wattages	Operation Time	Charging Time	Lifetime (Hrs)
COMPATIBLE EMERGENCY PACK				
S15609	6-13W	3 Hours	24 Hours	40,000
S15608	15-25W	1800	24 Hours	40,000



LED DIMMER SWITCHES

SKU	 Max. Load	 Min. Load	 Size (mm)	 Finish
VARILIGHT LED DIMMER SWITCH 1 GANG 2 WAY				
S15566	100W	10W	86x45x86	White
S15568	100W	10W	86x45x86	Chrome
S15570	100W	10W	86x45x86	Brushed
VARILIGHT LED DIMMER SWITCH 2 GANG 2 WAY				
S15569	100W	10W	92x45x92	White
S15567	100W	10W	92x45x92	Chrome
S15571	100W	10W	92x45x92	Brushed
VARILIGHT V-PRO DIMMER SWITCH MODULE				
S15572	100W	10W	25x40x50	N/A





LED BULKHEADS



SKU	Watt.	Lumens	Colour Temp	Beam Angle	IP Rating	Dimmable	Lifetime (Hrs)	Size (mm)	Finish
STANDARD									
S16172	15W	1270	5000K	120°	IP54	No	30,000	325x100	White
MICROWAVE									
S16173	15W	1270	5000K	120°	IP54	No	30,000	325x100	White
EMERGENCY									
S16174	15W	1270	5000K	120°	IP54	No	30,000	325x100	White
CORRIDOR & MICROWAVE									
S16176	15W	1270	5000K	120°	IP54	No	30,000	325x100	White
EMERGENCY & MICROWAVE									
S16175	15W	1270	5000K	120°	IP54	No	30,000	325x100	White
CORRIDOR, MICROWAVE & EMERGENCY									
S16177	15W	1270	5000K	120°	IP54	No	30,000	325x100	White



LED FLOODLIGHTS

SKU	Watt.	Lumens	Wattage Equiv	Colour Temp	Beam Angle	IP Rating	Dimmable	Lifetime (Hrs)	Size (mm)	Finish
80W FLOODLIGHT										
S16269	80W	9200	130W	6000K	120°	IP65	No	30,000	245x354x55	Black
150W FLOODLIGHT										
S16271	150W	17250	300W	6000K	120°	IP65	No	30,000	330x430x60	Black

70W FLOODLIGHT										
S18406	70W	8400	N/A	3000K	110°	IP65	No	50,000	232x229x48	Black
100W FLOODLIGHT										
S18407	70W	12000	N/A	3000K	110°	IP65	No	50,000	315x272x60	Black
S18411	70W	12000	N/A	5000K	110°	IP65	No	50,000	315x272x60	Black
150W FLOODLIGHT										
S18408	70W	18000	N/A	3000K	110°	IP65	No	50,000	351x297x60	Black
S18412	70W	18000	N/A	5000K	110°	IP65	No	50,000	351x297x60	Black
200W FLOODLIGHT										
S18409	200W	24000	N/A	3000K	110°	IP65	No	50,000	408x347x60	Black
S18413	200W	24000	N/A	5000K	110°	IP65	No	50,000	408x347x60	Black



LED HIGH BAYS

- 5 Year Product Warranty
- High Efficiency using SAMSUNG 2835 SMD Chips
- LiFud Non-Flicker 1-10v Dimable Driver with Potentiometer feature to reduce the lumen & power output power by 25%



SKU	Watt.	Lumens	Colour Temp	Beam Angle	IP Rating	Dimmable	Lifetime (Hrs)	Size (mm)	Finish
ESSENTIAL UFO HIGH BAY									
S16281	100W	13000	5700K	120°	IP67	Yes	50,000	252x180x252	Black
S16282	150W	19500	5700K	120°	IP67	Yes	50,000	250x190x250	Black
S16283	200W	26000	5700K	120°	IP67	Yes	50,000	280x228x280	Black
ESSENTIAL UFO HIGH BAY - EMERGENCY									
S16156	100W	13000	5700K	120°	IP67	Yes	50,000	252x180x252	Black
S16157	150W	19500	5700K	120°	IP67	Yes	50,000	250x190x250	Black
S16158	200W	26000	5700K	120°	IP67	Yes	50,000	280x228x280	Black



- 5 Year Product Warranty
- High Efficiency using Luxeon LUMILEDS SMD Chips
- Mean Well Non-Flicker 1-10v Dimmable Driver

									
SKU	Watt.	Lumens	Colour Temp	Beam Angle	IP Rating	Dimmable	Lifetime (Hrs)	Size (mm)	Finish

PREMIUM UFO HIGH BAY

S16311	100W	13000	4000K	120°	IP67	Yes	50,000	252x180x252	Black
S16201	100W	13000	5700K	120°	IP67	Yes	50,000	252x180x252	Black
S16284	150W	19500	4000K	120°	IP67	Yes	50,000	250x190x250	Black
S16266	150W	19500	5700K	120°	IP67	Yes	50,000	250x190x250	Black
S16312	200W	26000	4000K	120°	IP67	Yes	50,000	280x228x280	Black

PREMIUM UFO HIGH BAY - EMERGENCY

S16153	150W	19500	4000K	120°	IP67	Yes	50,000	250x190x250	Black
S16154	150W	19500	5700K	120°	IP67	Yes	50,000	250x190x250	Black
S16155	200W	26000	5700K	120°	IP67	Yes	50,000	280x228x280	Black



- 5 Year Product Warranty
- High Efficiency 170Lm/W SAMSUNG SMD Chips
- LiFud Non-Flicker 1-10v Dimmable Driver with potentiometer feature which can be used to reduce the output current/power by 25%

QPS HIGH EFFICIENCY UFO HIGH BAY

S16294	100W	17000	5700K	120°	IP65	Yes	50,000	260x260x127	Black
S16295	150W	25500	5700K	120°	IP65	Yes	50,000	260x260x130	Black
S16296	200W	34000	5700K	120°	IP65	Yes	50,000	260x260x130	Black



HIGH BAY ACCESSORIES

SKU	 Beam Angle	 Size (mm)	 Finish
LUMILIFE HIGH BAY REFLECTORS			
S15647	60°	130x343x130	Aluminium
S15648	90°	130x353x130	Aluminium
S15649	70°	130x450x130	Clear
QPS HIGH BAY REFLECTORS			
S16355	60°	N/A	Aluminium
S16356	90°	N/A	Aluminium
ADJUSTABLE SURFACE INSTALLATION BRACKET			
S16202	N/A	245x125x80	Black
MICROWAVE & DAYLIGHT SENSOR			
S15657	N/A	59x180x12	N/A
MICROWAVE SENSOR WITH BRACKET			
S15646	N/A	52x101x25.5	N/A
DAYLIGHT SENSOR WITH BRACKET			
S15645	N/A	693x215x215	N/A
MICROWAVE & DAYLIGHT SENSOR REMOTE CONTROL			
S15679	IP65	15x55x115	N/A





LED TRI-PROOF

SKU	Watt.	Lumens	Colour Temp	Beam Angle	IP Rating	IK Rating	Dimmable	Lifetime (Hrs)	Size (mm)	Finish
STANDARD										
S15508	18W	2300	5000K	120°	IP65	IK08	No	50,000	1200x96x79	Grey
S15511	40W	5200	5000K	120°	IP65	IK08	No	50,000	1200x96x79	Grey
S15514	48W	6200	5000K	120°	IP65	IK08	No	50,000	1500x96x79	Grey
S15517	58W	7500	5000K	120°	IP65	IK08	No	50,000	1500x96x79	Grey
S15520	55W	7100	5000K	120°	IP65	IK08	No	50,000	1800x96x79	Grey
S15523	69W	8900	5000K	120°	IP65	IK08	No	50,000	1800x96x79	Grey
EMERGENCY										
S15509	18W	2300	5000K	120°	IP65	IK08	No	50,000	1200x96x79	Grey
S15512	40W	5200	5000K	120°	IP65	IK08	No	50,000	1200x96x79	Grey
S15515	48W	6200	5000K	120°	IP65	IK08	No	50,000	1500x96x79	Grey
S15518	58W	7500	5000K	120°	IP65	IK08	No	50,000	1500x96x79	Grey
S15521	55W	7100	5000K	120°	IP65	IK08	No	50,000	1800x96x79	Grey
S15524	69W	8900	5000K	120°	IP65	IK08	No	50,000	1800x96x79	Grey
SENSOR										
S15510	18W	2300	5000K	120°	IP65	IK08	No	50,000	1200x96x79	Grey
S15513	40W	5200	5000K	120°	IP65	IK08	No	50,000	1200x96x79	Grey
S15516	48W	6200	5000K	120°	IP65	IK08	No	50,000	1500x96x79	Grey
S15519	58W	7500	5000K	120°	IP65	IK08	No	50,000	1500x96x79	Grey
S15522	55W	7100	5000K	120°	IP65	IK08	No	50,000	1800x96x79	Grey
S15525	69W	8900	5000K	120°	IP65	IK08	No	50,000	1800x96x79	Grey



LED TUBE FITTINGS



SKU	Watt.	Lumens	Colour Temp	Beam Angle	IP Rating	IK Rating	Dimmable	Lifetime (Hrs)	Size (mm)	Finish
SINGLE FITTING										1
S15526	N/A	N/A	N/A	N/A	IP65	IK06	N/A	N/A	86x655x72	
S15528	N/A	N/A	N/A	N/A	IP65	IK06	N/A	N/A	86x1265x72	
S15530	N/A	N/A	N/A	N/A	IP65	IK06	N/A	N/A	86x1565x72	
S16532	N/A	N/A	N/A	N/A	IP65	IK06	N/A	N/A	89x1848x88	
TWIN FITTING										2
S15527	N/A	N/A	N/A	N/A	IP65	IK06	N/A	N/A	86x655x115	
S15529	N/A	N/A	N/A	N/A	IP65	IK06	N/A	N/A	86x1265x115	
S15531	N/A	N/A	N/A	N/A	IP65	IK06	N/A	N/A	86x1565x115	
S16517	N/A	N/A	N/A	N/A	IP65	IK06	N/A	N/A	89x1848x115	



SKU	Watt.	Lumens	Wattage Equiv	Colour Temp	Beam Angle	Dimmable	Lifetime (Hrs)	Size (mm)	Finish
T8 LED Flicker-Free Tube Light									
S16528	8W	1000	18W	3000K	240°	No	50,000	600	N/A
S15489	8W	1050	18W	4000K	240°	No	50,000	600	N/A
S15490	8W	1050	18W	6500K	240°	No	50,000	600	N/A
S15491	17W	2100	36W	3000K	240°	No	50,000	1200	N/A
S15492	17W	2200	36W	4000K	240°	No	50,000	1200	N/A
S15493	17W	2200	36W	6500K	240°	No	50,000	1200	N/A
S15494	22W	2600	58W	3000K	240°	No	50,000	1500	N/A
S15495	22W	2750	58W	4000K	240°	No	50,000	1500	N/A
S15496	22W	2750	58W	6500K	240°	No	50,000	1500	N/A
S15497	30W	3600	70W	4000K	240°	No	50,000	1800	N/A
S15498	30W	3600	70W	6500K	240°	No	50,000	1800	N/A



LED PANELS



 SKU	 Watt.	 Lumens	 Colour Temp	 Beam Angle	 IP Rating	 Dimmable	 Lifetime (Hrs)	 Size (mm)	 Finish
TP(a) LED Panel - UGR<19									
S16730	36W	3400	3000K	90°	IP65	No	50,000	595x595x32	White
S16731	36W	3600	4000K	90°	IP65	No	50,000	595x595x32	White
S16732	36W	3600	5000K	90°	IP65	No	50,000	595x595x32	White
S16733	36W	3600	6000K	90°	IP65	No	50,000	595x595x32	White
TP(b) LED PANEL									
S16292	18W	1800	4000K	110°	IP65	No	35,000	295x295x10	White
S16293	18W	1800	5000K	110°	IP65	No	35,000	295x295x10	White
S16290	20W	2000	4000K	120°	IP65	No	50,000	295x295x10	White
S16291	20W	2000	5000K	120°	IP65	No	50,000	295x295x10	White
S16359	40W	4000	4000K	110°	IP65	No	35,000	595x595x10	White
S16285	40W	4000	5000K	110°	IP65	No	35,000	595x595x10	White
S16288	40W	4000	4000K	120°	IP65	No	30,000	295x1195x10	White
S16289	40W	4000	5000K	120°	IP65	No	30,000	295x1195x10	White
S16286	60W	6000	4000K	110°	IP65	No	25,000	595x1195x10	White
S16287	60W	6000	5000K	110°	IP65	No	25,000	595x1195x10	White




LED PANEL ACCESSORIES

SKU	Size (mm)	Finish
SURFACE MOUNTING FRAME		
S15658	600x600	White
S15662	300x300	White
S15660	300x600	White
S15661	300x1200	White
S15659	600x1200	White
DRIVER TO PANEL EXTENSION		
S15673	500mm	N/A

- 4 Pack Compatible with 300x300, 600x300 & 600x600
- 6 Pack Compatible with 300x1200 & 600x1200

1M SUSPENSION KIT		
S15671	4 Pack	N/A
S15672	6 Pack	N/A
SPRING CLIP SET		
S15673	4 Pack	N/A
S15674	6 Pack	N/A

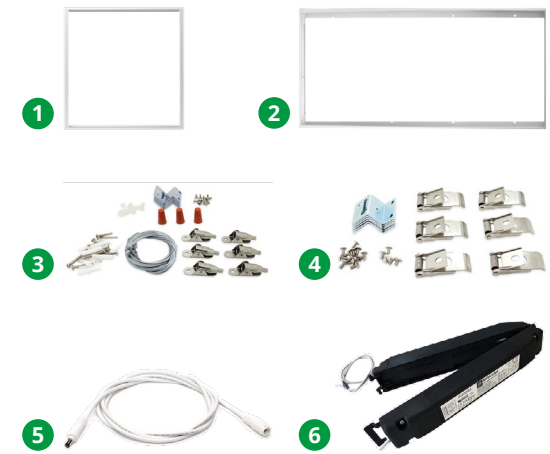

SKU	Compatible Wattages	Operation Time	Charging Time	Lifetime (Hrs)
COMPATIBLE EMERGENCY PACK				
S15595	6-13W	3 Hours	24 Hours	40,000




EMERGENCY FITTINGS



SKU	Watt.	Colour Temp	Operation Time	Arrow Direction	IP Rating	Lifetime (Hrs)	Size (mm)	
LED EMERGENCY EXIT SIGN MAINTAINED - SUSPENDED								
S16028	4W	N/A	3 Hours	Down	IP65	30,000	400x300x52	
S16693	4W	N/A	3 Hours	Up	IP65	30,000	400x300x52	
S16692	4W	N/A	3 Hours	Left/Right	IP65	30,000	400x300x52	1
LED EMERGENCY EXIT SIGN MAINTAINED - RECESSED								
S16029	4W	N/A	3 Hours	Down	IP65	30,000	170x410	
S16691	4W	N/A	3 Hours	Up	IP65	30,000	170x410	
S16690	4W	N/A	3 Hours	Left/Right	IP65	30,000	170x410	2
RUNNING MAN LEGEND FOR SURFACE MOUNTED EXIT SIGN								
S16773	N/A	N/A	N/A	Down	N/A	N/A	380x180x1	3
S15610	N/A	N/A	N/A	Up	N/A	N/A	380x180x1	
S16687	N/A	N/A	N/A	Left	N/A	N/A	380x180x1	
S16688	N/A	N/A	N/A	Right	N/A	N/A	380x180x1	



 SKU	 Watt.	 Lumens	 Colour Temp	 Operation Time	 Charging Time	 IP Rating	 Lifetime (Hrs)	 Cut-Out (mm)	 Size (mm)
LED TWIN-SPOT NON-MAINTAINED - SELF-TEST									
S16030	2x3W	410	N/A	3 Hours	N/A	IP65	30,000	N/A	294x300x73
EMERGENCY BULKHEAD MAINTAINED/NON-MAINTAINED									
S16092	4W	180	6000K	3 Hours	N/A	IP65	N/A	N/A	352x110x65
3W LED LAMP & TRANSFORMER KIT - NON-MAINTAINED									
S15573	3W	N/A	N/A	3 Hours	24 Hours	IP20	N/A	42mm	37x360x21.5
DALI WITH SELF-TEST EMERGENCY PACK									
S15596	4W	N/A	N/A	3 Hours	24 Hours	IP20	N/A	N/A	68x270x38

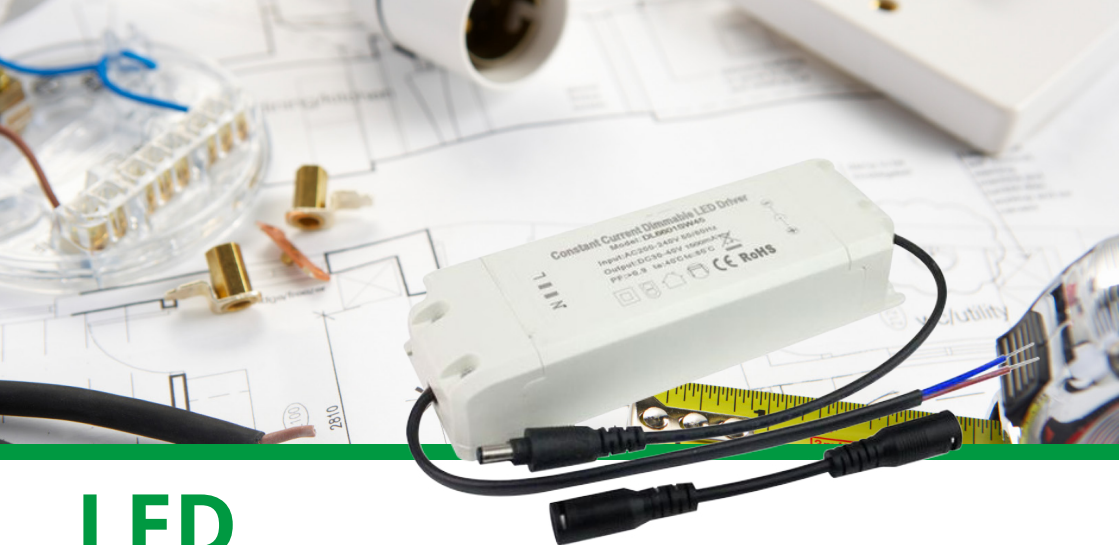

LED TRANSFORMERS

SKU	Watt.	Lumens	Colour Temp	Beam Angle	IP Rating	Dimmable	Lifetime (Hrs)	Size (mm)	Finish
LED TRANSFORMER/DRIVER									
S15633	20W	N/A	N/A	N/A	IP20	Yes	40,000	27x140x45	N/A
S15634	30W	N/A	N/A	N/A	IP20	Yes	40,000	60x180x35	N/A
S15630	50W	N/A	N/A	N/A	IP20	Yes	40,000	60x180x35	N/A
S15632	60W	N/A	N/A	N/A	IP20	Yes	40,000	69x210x43	N/A
S15625	20W	N/A	N/A	N/A	IP67	No	40,000	30x183x20	N/A
S15624	30W	N/A	N/A	N/A	IP67	No	40,000	29x220x20	N/A
S15629	50W	N/A	N/A	N/A	IP67	No	40,000	35x200x25	N/A
S15631	60W	N/A	N/A	N/A	IP67	No	40,000	69x187x43	N/A
S15622	80W	N/A	N/A	N/A	IP67	No	40,000	69x177x43	N/A
S15623	100W	N/A	N/A	N/A	IP67	No	40,000	68x210x43	N/A
S15621	150W	N/A	N/A	N/A	IP67	No	40,000	67x239x49	N/A
S15618	6W	N/A	N/A	N/A	IP20	No	40,000	43x115x28	N/A
S15619	24W	N/A	N/A	N/A	IP20	No	40,000	45x139x28	N/A
S15620	36W	N/A	N/A	N/A	IP20	No	40,000	45x139x28	N/A
DALI LED PANEL TRANSFORMER/DRIVER									
S15670	60W	N/A	N/A	N/A	N/A	Yes	25,000	31x220x85	N/A



SENSORS



SKU	IP Rating	Size (mm)	Finish
OUTDOOR 360° PIR MOTION SENSOR			
S15586	IP44	83x60x115	Black
OUTDOOR 360° PIR WITH SINGLE SENSOR			
S15587	IP44	115x60	White
360° SURFACE MOUNT PIR WITH 3 SENSORS			
S15588	IP44	55x88x88	Stainless Steel
INFRARED MOTION SENSOR			
S15589	IP44	N/A	Stainless Steel
PHOTOCELL WITH DUSK TILL DAWN			
S15590	IP44	N/A	White
WALL MOUNTED ADJUSTABLE PIR			
S15611	IP65	51.5x80x119.50	Black
S15612	IP65	51.5x80x119.50	White





Visit: www.lumilife.co.uk
Telephone: **0161 655 0660** or Email: trade@lumilife.co.uk